

Residential Single-Wall Indirect Water Heater



Photo is of
NSW-2-65-L

ULTONIUM®
+
MICROBAN®

The Single-Wall Indirect Models feature:

- **Heat Exchanger**—Single-Wall 1½" (38mm) O.D. glass coated (Ultonium® glass lining with Microban®) carbon steel coil. The coil has a heat transfer area of 14.2 sq. ft. and a stored water volume of 2.7 Gal. (10.2L) Maximum supply temperature from the boiler must not exceed 240°F (116°C).
- **Factory Installed Sparge Tube System**—Sediment reducing device that also increases first hour delivery of hot water while minimizing temperature build-up in tank.
- **Ultonium® Glass Lining with Microban®**—An exclusively engineered enamel formula that is applied to the interior surface of the steel for superior protection against corrosion. Microban® antimicrobial technology helps prevent the growth of bacteria, mold and mildew on the surface of the tank lining.
- **Immersed Adjustable Honeywell Aquastat**—Fast acting immersion aquastat for automatic temperature control (adjustable from 80°F to 160°F), (27°C to 71°C).
- **Supply and Return Connections**—1" (25mm) NPT female connections are located on the front for both the boiler collector supply and return.
- **Insulation System**—2" (51mm) Non-CFC foam insulation covers the sides and top of the tank, reducing heat loss. This results in less energy consumption, improved efficiencies, and jacket rigidity.
- **Potable Water Connections**—¾" (19mm) NPT (1" (25mm) NPT for 120 gallon (454L) model) factory installed true dielectric fittings extend water heater life and eases installation.
- **Three Protective Anode Rods**—Provide added protection against corrosion for long-term, trouble-free service.
- **Steel Tank**—Heavy gauge steel automatically formed, rolled and welded to assure a continuous seam for glass lining.
- **T&P Relief Valve**—Included.
- **Low Restriction Brass Drain Valve**—Durable tamper proof design.
- **AHRI Certified**—These water heaters are rated by the Air-Conditioning, Heating, and Refrigeration Institute to provide accurate performance data within the standards of the certification. This certification provides a recognized standard for proper comparison of hydronic appliances.



5-Year Limited Tank Warranties / 1-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada and Puerto Rico. Some states do not allow limitations on warranties. See complete copy of the warranty included with the heater.

Microban® antimicrobial product protection helps prevent the growth of bacteria, mold and mildew that may affect the product. The built-in antimicrobial properties do not protect users or others from disease-causing organisms. Microban® is a registered trademark of Microban Products Company.

Residential Single-Wall Indirect Water Heater

Single Wall Models

Meet or exceed ASHRAE 90.1 (latest edition)

Model Number	Capacity		A Floor to Heater Top	B Jacket Dia.	C Floor to T&P Conn.	D Floor to Water Conn.	E Floor to Exchanger Outlet	F Floor to Exchanger Inlet	G Floor to Aquastat	Approx. Shipping Weight
	U.S. Gal.	Imp. Gal.	in.	in.	in.	in.	in.	in.	in.	lbs.
NSW-2-30-L	29	24	33 ⁵ / ₈	22	28 ¹ / ₄	34 ³ / ₈	5 ³ / ₈	27 ¹ / ₂	11 ¹ / ₂	164
NSW-2-40R-L	37	31	41 ¹ / ₈	22	34 ³ / ₈	41 ⁷ / ₈	5 ³ / ₈	27 ¹ / ₂	11 ¹ / ₂	185
NSW-2-50R-L	43	36	46 ¹ / ₄	22	40 ¹ / ₈	47	5 ³ / ₈	27 ¹ / ₂	11 ¹ / ₂	195
NSW-2-65-L	57	47	59 ¹ / ₄	22	53 ¹ / ₈	60	5 ³ / ₈	27 ¹ / ₂	11 ¹ / ₂	225
NSW-2-80-L	71	59	59	24	52 ⁷ / ₈	59 ³ / ₄	5 ³ / ₈	27 ¹ / ₂	11 ¹ / ₂	250
NSW-2-120-L	110	92	62 ¹ / ₂	28 ¹ / ₄	55 ³ / ₄	63 ¹ / ₄	6 ³ / ₈	28 ¹ / ₂	11 ¹ / ₂	370

Model Number	Capacity		A Floor to Heater Top	B Jacket Dia.	C Floor to T&P Conn.	D Floor to Water Conn.	E Floor to Exchanger Outlet	F Floor to Exchanger Inlet	G Floor to Aquastat	Approx. Shipping Weight
	Liters		mm.	mm.	mm.	mm.	mm.	mm.	mm.	kg.
NSW-2-30-L	110		854	559	718	873	137	699	292	74
NSW-2-40R-L	140		1045	559	873	1064	137	699	292	85
NSW-2-50R-L	163		1175	559	1019	1194	137	699	292	89
NSW-2-65-L	216		1505	559	1349	1524	137	699	292	102
NSW-2-80-L	269		1499	610	1343	1518	137	699	292	114
NSW-2-120-L	416		1588	718	1416	1607	162	720	292	167

AHRI Certified Water Heater Ratings

Model Number	First Hour Delivery @ 135°F (Gal.)	Continuous Draw Rating @ 135°F (Gal./Hr.)	Standby Heat Loss Rating (°F/Hr.)	Minimum Output Rate of Heat Source (BTU/Hr.)	Minimum Heat Source Flow Rate (Gal./Min.)
NSW-2-30-L	197	180	1.2	120,000	13.7
NSW-2-40R-L	205	180	1.1	120,000	13.7
NSW-2-50R-L	210	180	0.9	120,000	13.7
NSW-2-65-L	215	175	0.7	115,000	13.7
NSW-2-80-L	235	175	0.6	115,000	13.7
NSW-2-120-L	265	175	0.4	115,000	13.7

Model Number	First Hour Delivery @ 57°C (Liters)	Continuous Draw Rating @ 57°C (Liters/Hr.)	Standby Heat Loss Rating (°C/Hr.)	Minimum Output Rate of Heat Source (kW/Hr.)	Minimum Heat Source Flow Rate (Liters/Min.)
NSW-2-30-L	746	681	0.67	35.0	51.8
NSW-2-40R-L	776	681	0.61	35.0	51.8
NSW-2-50R-L	795	681	0.50	35.0	51.8
NSW-2-65-L	814	662	0.39	34.0	51.8
NSW-2-80-L	889	662	0.33	34.0	51.8
NSW-2-120-L	1003	662	0.22	34.0	51.8


These certified ratings were obtained with a heat source output rate and flow rate as specified and a 180°F (82°C) boiler water supply temperature. Other results will be obtained under different conditions.

DOE Water Heater Performance

Model Number	Maximum First Hour Rating (Gal.) @ 140°F 115°F		Continuous Draw Rating (Gal./Min.) @ 140°F 115°F		Approximate Boiler Output Needed for Ratings (BTU/Hr.)
NSW-2-30-L	226	342	3.3	5.2	180,000
NSW-2-40R-L	235	351	3.3	5.2	180,000
NSW-2-50R-L	244	360	3.3	5.2	180,000
NSW-2-65-L	258	374	3.3	5.2	180,000
NSW-2-80-L	272	388	3.3	5.2	180,000
NSW-2-120-L	309	425	3.3	5.2	180,000

Based on 200°F boiler water temperature and 50°F potable water inlet.

Heat Exchanger Head Loss					
GPM	2	5	8	10	12
Ft. of Hd. Loss	0.01	0.20	0.50	0.80	1.20

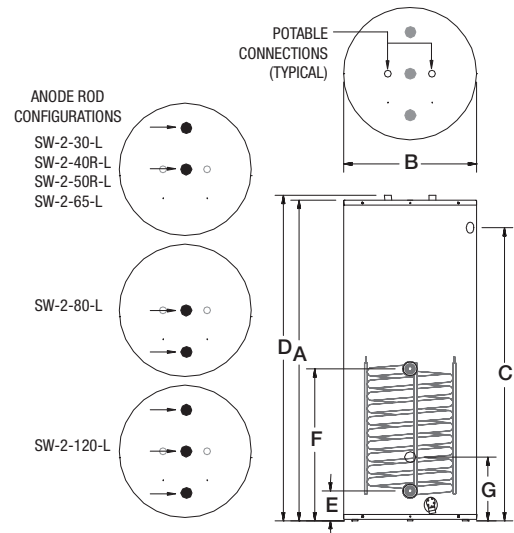

General:

All units are certified at 300 PSI (2068 kPa) test pressure and 150 PSI (1034 kPa) working pressure. Potable water connections are 3/4" (19mm) NPT on 8" (203mm) centers. The 120 gallon model has 1" (25mm) NPT potable water connections on 8" (203 mm) centers.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

Suitable for Water (Potable) Heating and Space Heating.

Toxic chemicals, such as those used for boiler treatment, shall NEVER be introduced into the potable side of this system. The potable side may NEVER be connected to any existing heating system or component(s) previously used with a non-potable water heating appliance. The heat exchanger side of the unit may be used in space heating applications.

Niles Steel Tank ■ 1701 Terminal Road ■ PO Box 728 ■ Niles, MI 49120
Phone: 269-683-1910 ■ FAX: 269-683-1953 ■ www.nilesst.com